

● ● ● ● ● **INTERIOR & EXTERIOR LIGHTING**
 ● ● ● ● ● **FLEX LED - FR4 LED LINE BRIGHT & ANTARES STRIPES**
 ● ● ● ● ●



STRISCE LED FLESSIBILI MONOCROMATICHE & RGB

COD. ALF60 (CW - NW - WW) _ 60 LED/Mt - ROLLA DA 5 Mt

COD. ALF72 (CW - NW - WW) _ 72 LED/Mt - ROLLA DA 5 Mt

COD. ALF60 RGB _ 60 LED/Mt - ROLLA DA 5 Mt

COD. ALF84 RGB _ 84 LED/Mt - ROLLA DA 5 Mt

-Alimentazione **24V DC**

-**Resinatura** in profili per uso **outdoor** **su richiesta**

-Possibile taglio e connessione a moduli di 6 LED

-Range **ALIMENTATORI** a pag. **76**

-Range **CONTROLLER** da pag. **68**

MONOCHROME & RGB FLEXIBLE LED STRIPS

COD. ALF60 (CW - NW - WW) _ 60 LED/Mt - 5 Mt ROLL

COD. ALF72 (CW - NW - WW) _ 72 LED/Mt - 5 Mt ROLL

COD. ALF60 RGB _ 60 LED/Mt - 5 Mt ROLL

COD. ALF84 RGB _ 84 LED/Mt - 5 Mt ROLL

-Power supply **24V DC**

-**Resin application** in profiles for **outdoor** use **on request**

-Easily to assemble cut and connect every 6 LEDs modules

-**POWER SUPPLY** Range page **76**

-**CONTROLLER** Range from page **68**



Codice/Code	Supporto/Support	Voltaggio Voltage	No. LED/ mt	Taglio/Cut	Lunghezza Length (mm)	LED Totali Total LED	LED	W	W/mt	Colore Color	Lumen/mt
ALF60 CW	Flessibile/Flexible	DC 24V	60	Ogni 6 LEDs Every 6 LEDs	500	300	5050	72	14,4	Bianco freddo/ Cold White	1400
ALF72 NW	Flessibile/Flexible	DC 24V	60	Ogni 6 LEDs Every 6 LEDs	500	300	5050	72	14,4	Bianco neutro/ Neutral White	1350
ALF72 WW	Flessibile/Flexible	DC 24V	60	Ogni 6 LEDs Every 6 LEDs	500	300	5050	72	14,4	Bianco caldo/ Warm White	1300
ALF72 CW	Flessibile/Flexible	DC 24V	72	Ogni 6 LEDs Every 6 LEDs	500	360	5050	81	16,2	Bianco freddo/ Cold White	1680
ALF72 NW	Flessibile/Flexible	DC 24V	72	Ogni 6 LEDs Every 6 LEDs	500	360	5050	81	16,2	Bianco neutro/ Neutral White	1620
ALF72 WW	Flessibile/Flexible	DC 24V	72	Ogni 6 LEDs Every 6 LEDs	500	360	5050	81	16,2	Bianco caldo/ Warm White	1560
ALF60 RGB	Flessibile/Flexible	DC 24V	60	Ogni 6 LEDs Every 6 LEDs	500	300	5050	72	14,4	RGB	1300
ALF84 RGB	Flessibile/Flexible	DC 24V	84	Ogni 6 LEDs Every 6 LEDs	500	420	5050	85	17	RGB	1820

Su richiesta IP 67
On request IP 67

Standard CW 6000°-6500° K
Standard NW 4000°-4500° K
Standard WW 2800°-3200° K

LED LINE BRIGHT & LED ANTARES STRIPS

Flex LED Line Bright

STRISCE LED FLESSIBILI MONOCROMATICHE

COD. ALF168 (CW - NW - WW) _ 168 LED/Mt - ROLLA DA 5 Mt

COD. ALF240 (CW - NW - WW) _ 240 LED/Mt - ROLLA DA 5 Mt

-Alimentazione **24V DC**

-**Resinatura** in profili per uso **outdoor** su richiesta

-Facili da assemblare e connettere

-Possibile taglio e connessione a moduli di 6 LED

-**Range ALIMENTATORI** a pag. 76

-**Range CONTROLLER** da pag.68



MONOCHROME FLEXIBLE LED STRIPS

CODE ALF168 (CW - NW - WW) _ 168 LED/Mt - 5 Mt ROLLA

CODE ALF240 (CW - NW - WW) _ 240 LED/Mt - 5 Mt ROLLA

-Power supply **24V DC**

-**Resin application** in profiles for **outdoor** use on request

-Easily to assemble cut and connect every 6 LEDs modul

-**POWER SUPPLY** Range page76

-**CONTROLLER** Range from page 68



Codice/Code	Supporto/Support	Voltaggio Voltage	No. LED/mt	Taglio/Cut	Lunghezza Length (mm)	LED Totali Total LED	LED	Watt	W/mt	Colore Color	Lumen/mt
ALF168CW	Flessibile/Flexible	DC 24V	168	Ogni 6 LEDs Every 6 LEDs	500	840	3014	100	20	Bianco freddo/ Cold White	2400
ALF168NW	Flessibile/Flexible	DC 24V	168	Ogni 6 LEDs Every 6 LEDs	500	840	3014	100	20	Bianco neutro/ Neutral White	2200
ALF168WW	Flessibile/Flexible	DC 24V	168	Ogni 6 LEDs Every 6 LEDs	500	840	3014	100	20	Bianco Caldo/ Warm White	2000

Codice/Code	Supporto/Support	Voltaggio Voltage	No. LED/mt	Taglio/Cut	Lunghezza Length (mm)	LED Totali Total LED	LED	Watt	W/mt	Colore Color	Lumen/mt
ALF240WW	Flessibile/Flexible	DC 24V	240	Ogni 6 LEDs Every 6 LEDs	500	120	3014	120	24	Bianco freddo/ Cold White	3400
ALF240NW	Flessibile/Flexible	DC 24V	240	Ogni 6 LEDs Every 6 LEDs	500	120	3014	120	24	Bianco neutro/ Neutral White	3150
ALF240WW	Flessibile/Flexible	DC 24V	240	Ogni 6 LEDs Every 6 LEDs	500	120	3014	120	24	Bianco caldo/ Warm White	2900

Standard CW 6000°-6500° K
Standard NW 4000°-4500° K
Standard WW 3000°-3500° K

LED Bars Line Bright

BARRE LED RIGIDE MONOCROMATICHE

COD. ALR240 (240 LED METRO - BARRE DA CM.50)


-Alimentazione **24V DC**

-**Resinatura** in profili per uso **outdoor** su richiesta

-Possibile taglio e connessione a moduli di 6 LED

-**Range ALIMENTATORI** a pag. 76

-**Range CONTROLLER** da pag.68

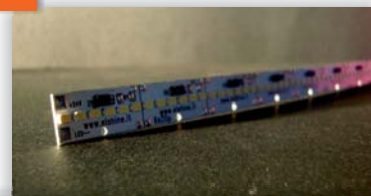

MONOCHROME RIGID LED BARS

CODE ALR240 (240 LED/METER - EACH BAR CM.50)

-Power supply **24V DC**

-**Resin application** in profiles for **outdoor** use on request

-Easily to assemble cut and connect every 6 LEDs modules

-**POWER SUPPLY** Range page76




Codice/Code	Supporto/Support	Voltaggio Voltage	No. LED/mt	Taglio/Cut	Lunghezza Length (mm)	LED Totali Total LED	LED	Watt	W/mt	Colore Color	Lumen/mt
ALR240CW	Rigido/Rigid	DC 24V	240	Ogni 6 LEDs Every 6 LEDs	500	120	3014	120	24	Bianco freddo/ Cold White	3400
ALR240NW	Rigido/Rigid	DC 24V	240	Ogni 6 LEDs Every 6 LEDs	500	120	3014	120	24	Bianco neutro/ Neutral White	3150
ALR240WW	Rigido/Rigid	DC 24V	240	Ogni 6 LEDs Every 6 LEDs	500	120	3014	120	24	Bianco caldo/ Warm White	2900


Standard CW 6000°-6500° K
Standard NW 4000°-4500° K
Standard WW 2800°-3200° K


ELSHINE

New Lighting Technologies

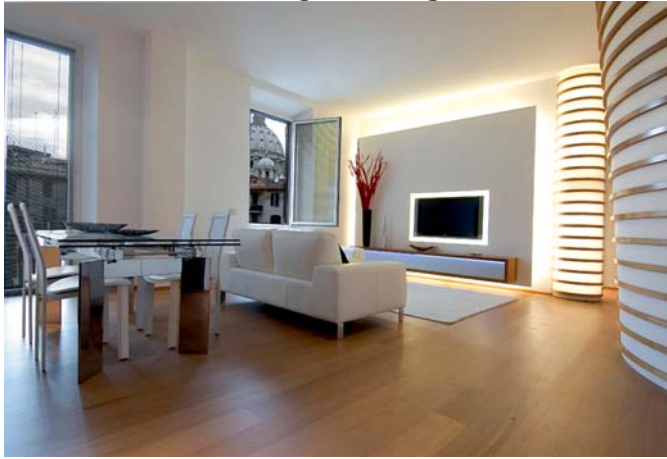

LED Line Bright & LED Antares Strips

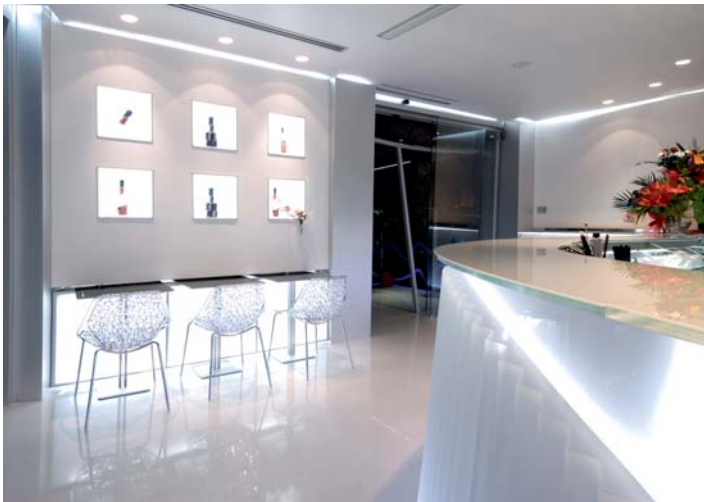

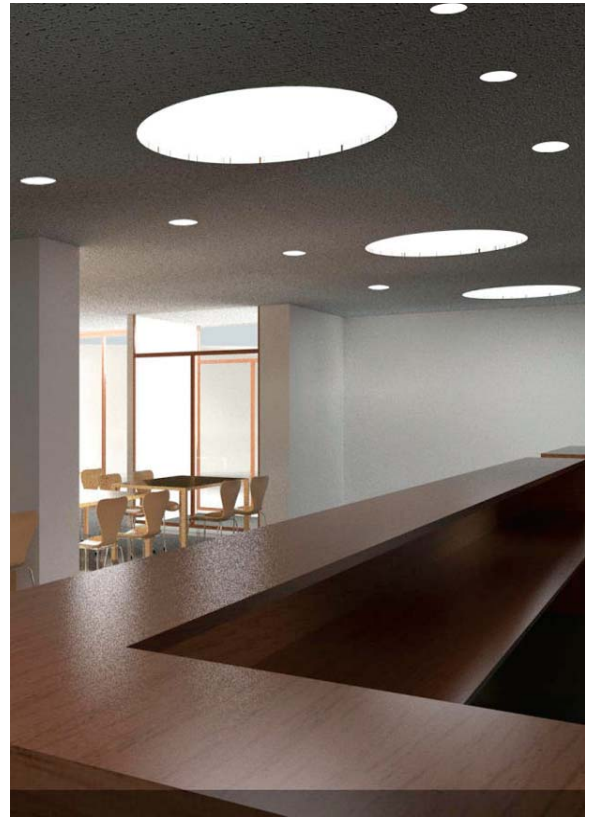

LED Line Bright & LED Antares Strips